


THERMOZELL

Trockenrohdichte

DATENBLATT

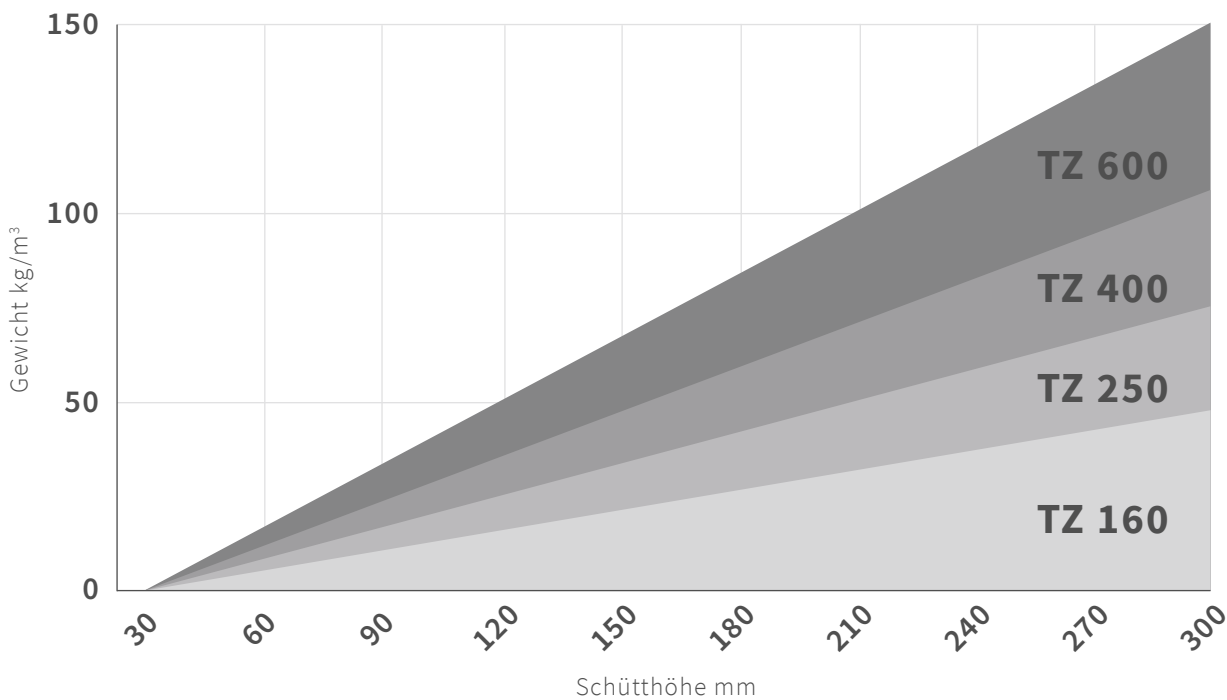

Thermozell Type	TZ 160	TZ 250	TZ 400	TZ 600
Gewicht kg/m³	165	250	350	500
	+/-10 %	+/-10 %	+/-10 %	+/-15 %
Schütthöhe mm	Gewicht kg/m²			
30	4,95	7,50	10,50	15,00
60	9,90	15,00	21,00	30,00
90	14,85	22,50	31,50	45,00
120	19,80	30,00	42,00	60,00
150	24,75	37,50	52,50	75,00
180	29,70	45,00	63,00	90,00
210	34,65	52,50	73,50	105,00
240	39,60	60,00	84,00	120,00
270	44,55	67,50	94,50	135,00
300	49,50	75,00	105,00	150,00